FIRE RESISTANT LETTERPLATE

For 40-80mm Door Profiles

Salamander® Framemaster Firecheck

Finishes	Product Code 40-80mm	Plastic Frame Colour	Flap Material	Coating Guarantee
Gold Anodised	FMB1248G-FR	Black	Aluminium	5 Years
Silver Anodised	FMB1248SA-FR	Black	Aluminium	5 Years
White Powder Coat	FMB1248W-FR	Black	Aluminium	5 Years
Black Powder Coat	FMB1248B-FR	Black	Aluminium	5 Years
PVD Gold	FMB1248PVDG-FR-NANOCAS	т Black	Stainless Steel	Lifetime
Mirror Polished	FMB1248MPSS-FR-NANOCAS	т Black	Stainless Steel	Lifetime
Satin Stainless	FMB1248SSS-FR-NANOCAST	Black	Stainless Steel	Lifetime

Sizes	
Distance Between Screw Holes	274mm
Letterplate Length	300mm
Letterplate Height	65mm
Frame Material	Plastic
Cavity Hole Size	x 251.8mm 43.8mm





All Aluminium Letterplates



Finishes	Product Code	Material Construction	Coating Guarantee
Gold Anodised	FMG1248G-FR	Aluminium	10 Years Colour Fast
Silver Anodised	FMG1248S-FR	Aluminium	10 Years Colour Fast
Black Powder Coat	FMG1248BALU-FR	Aluminium	10 Years Colour Fast
White Powder Coat	FMG1248WALU-FR	Aluminium	10 Years Colour Fast
Polished Silver	FMG1248PS-FR	Aluminium	10 Years Colour Fast





All Stainless Steel Letterplates



Finishes	Product Code	Material Construction	Coating Guarantee
PVD Gold	FMSS1248PVDG-FR-NANOCAST	Stainless Steel	Lifetime
Mirror Polished	FMSS1248MPSS-FR-NANOCAST	Stainless Steel	Lifetime
Satin Stainless	FMSS1248SSS-FR-NANOCAST	Stainless Steel	Lifetime

Sizes	
Distance Between Screw Holes	272mm
Letterplate Length	300mm
Letterplate Height	74mm
Letterplate Width	40-80mm
Cavity Hole Size	257mm x 42mm







FIRE RESISTANT LETTERPLATE

For 40-80mm Door Profiles

Ultra Flexible Springs 1 Hour Fire Rated

Outward facing, draft proof brushes

Outward facing brushes create the Anti-Vandal feature as it prevents vandals from placing unwanted items into the cavity


Outwards facing brushes also means better draught proofing and makes it easier to post letters through

An internal water seal prevents water getting into the door or panel, and stops letters getting wet

Conforms to many standards and testing requirements including BS EN 1303:2005

Blind bolts to the exterior

180° Opening

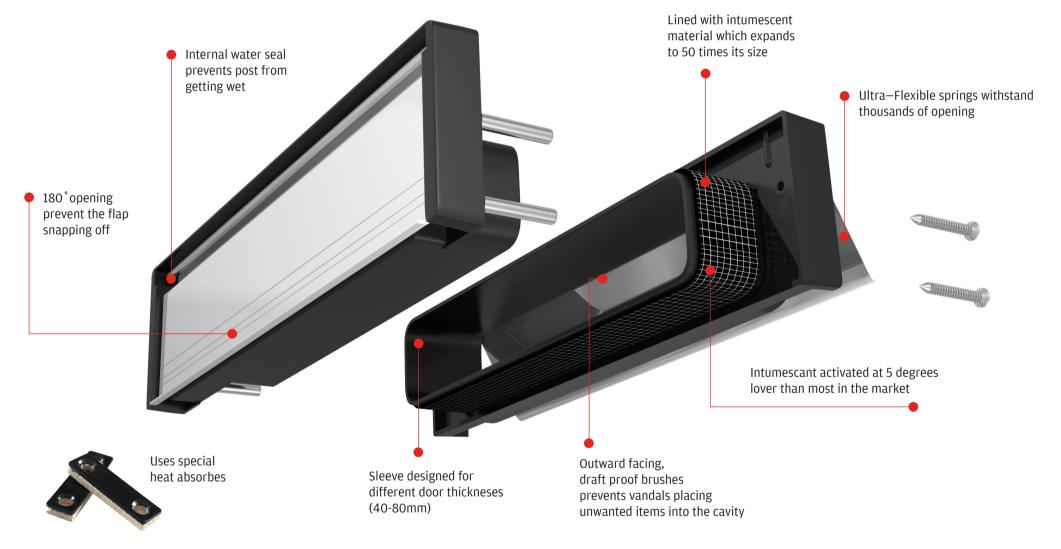





ANTI SNAP FLAP



ANTI VANDAL



ANTI BURGLAR

